


fibraplac | MELAMINE

We offer our MDF boards coated with melamine paper on our substrates FIBRAPLAC CRUDO®, FIBRAPLAC LIGHT® and FIBRAPLAC RH®. FIBRAPLAC MELAMINE® It is available in several thicknesses and formats, depending on the type of board.

CHARACTERISTICS

FIBRAPLAC MELAMINE® it has a decorative coating impregnated with melamine resins adhered by means of a process with controlled conditions of pressure, time and temperature. This results in a totally closed surface, free of pores, hard and resistant to heat. Doesn't require additional finishes. The melamine coating supports the spillage of liquids for domestic use and food. Due to its coating it has greater weight support and resistance to combustion than raw boards, it has excellent internal compaction and optimum grip of the screw.

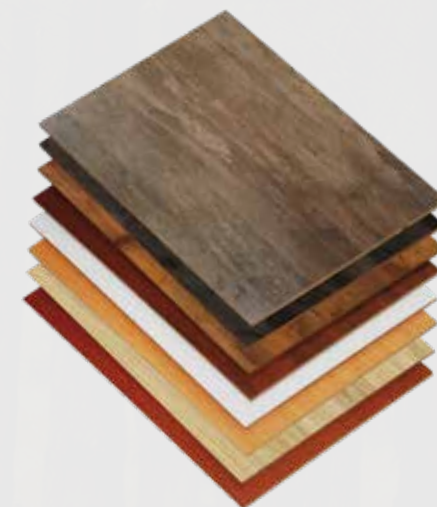



Also available in substrate RH

RH | MOISTURE
RESISTANT

TECHNICAL SPECIFICATIONS

| THICKNESSES mm [±0,2] | BOARDS / PALLET [U] | FORMAT [m] | DENSITY [kg/m³] | MOISTURE [%] | ABSORPTION 1 h. [% Weight] | SWELLING max. 1 h. [%] | INTERNAL TRACTION¹ [kg/cm²] | FLEXION² [kg/cm²] | SCREW GRIP [kg] | | |
|-----------------------------|---------------------------|---------------|-------------------------------|-----------------|----------------------------------|------------------------------|-----------------------------------|-------------------------------|-----------------------|-----------------------------|--|
| *4 | 130 | 1.83 X 2.44 | 900 ± 6% | 5 - 11 | STD: max. 15 RH: max. 10 | max. 5 | min. 10 | min. 450 | N/A | | |
| 5.5 | 100 | | 920 ± 6% | | | | STD: min. 10 RH: min. 14 | STD: min. 400 RH: min. 690 | | | |
| 9 | 80 | | STD: 720 ± 6% RH: 730 ± 6% | | | | STD: min. 8 RH: min. 8,5 | STD: min. 350 RH: min. 400 | | | |
| 12 | 60 | | 620 ± 6% | | max. 15 | | min. 8 | min. 300 | | | |
| 15 | 48 | | | | STD: max. 15 RH: max. 10 | | STD: min. 7,5 RH: min. 8,5 | STD: min. 300 RH: min. 300 | | | |
| 18 | 40 | | | | | | STD: min. 250 RH: min. 300 | STD: min. 95 RH: min. 100 | | | |
| 25 | 28 | | | | max. 10 | max. 2 | STD: min. 6,5 RH: min. 7 | STD: min. 230 RH: min. 250 | | STD: min. 80 RH: min. 70 | |
| 30 | 24 | | STD: 580 ± 6% RH: 550 ± 6% | | | | min. 200 | min. 80 | | | |
| 36 | 20 | | 550 ± 6% | | | | STD: min. 200 RH: min. 170 | STD: min. 80 RH: min. 75 | | | |

- 1 Defines the bonding strenght of the fibers inside the board.
- 2 It is defined by the allowable load capacity that a board supports, considering supports at both ends of it.
- 3 Available single sided decorative laminate on standard substrate.



This product generates waste cataloged as NOT DANGEROUS

USES AND APPLICATIONS

- Furniture of domestic use
- Kitchen fronts
- Furniture fund
- Doors and tables
- Decorative coatings
- Work stations
- Bathrooms

...and more



ADVANTAGE

- ✓ Wide range of designs
- ✓ Textured surface
- ✓ Decorative laminate on one or two sides
- ✓ Stain resistant and easy to clean
- ✓ Clean cuts without chipping
- ✓ It can be drilled
- ✓ Wide variety of thicknesses
- ✓ Easy to handle and transport
- ✓ Optimal exploitation of the board

RECOMMENDATIONS

- Do not expose the boards directly to the sun or rain, as well as protect the faces and seal the edges.
- Realize the guide perforation and that the screw used has a diameter less than or same to 30% of the thickness of the plate.
- For the sizing stage of the board, the use of gloves, protective goggles and a mask is recommended to avoid contact of dust in the respiratory tract and eyesight.
- For handling transport and storage it is recommended make use elements or machinery of load lifting.